

# INSTRUCTIONS: POPPK1

## Floor Display

### Includes:


- A. Spinner Base (1)
- B. Side 1 (2)
- C. Side 2 (2)
- D. Shelves (26)
- E. Acrylic Inserts (26)
- F. Shelf Dividers (26)
- G. Marketing Sign (2)
- H. Topper (1)
- I. Bolts (4)
- J. Cross Dowels (4)
- K. Allen Wrench (1)




16.5"W x 72.75"H x 16.5"D

### Notes:

- Two-person assembly

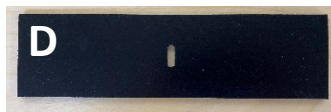

**Shelves**

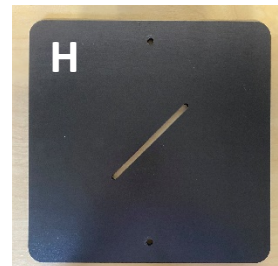

**Topper**



**Marketing Sign**




**Cross Dowels**



**Allen Wrench**




**Acrylic Inserts**



**Spinner Base**



**Bolts**



**Shelf Dividers**



**Side 1**





**Side 2**



1. Interlock Side 1 (B) and Side 2 (C) together. Make sure the shelf slots are facing inside. Repeat for the other set, then connect all four sides together.



2. Place Topper (H) by aligning groove with all four sides and sliding down. Insert two Cross Dowels (J) into the circular openings at the top of Side 2 (C). Assure the slits in the Cross Dowels (J) are vertical, using a Flat Head Screwdriver.

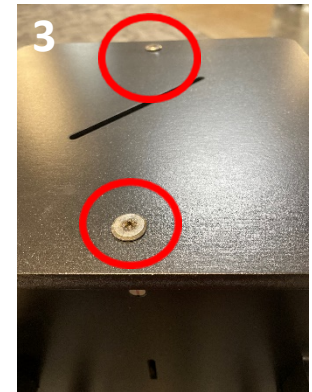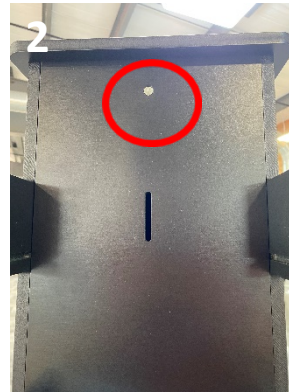


3. Screw one Bolt (I) through Topper (H) and into Side 2 (C). Repeat for second Bolt (I) on opposite Side 2 (C).


**Note:** If assembled correctly, Bolts (I) will interlock with Cross Dowels (J) for stability.

4. Flip the entire display upside down. Place Spinner Base (A) by aligning groove with all four sides and sliding down. Insert two Cross Dowels (J) into the circular openings at the top of Side 1 (B). Assure the slits in the Cross Dowels (J) are vertical, using a Flat Head Screwdriver.

**Note:** Flipping the display will require two people.

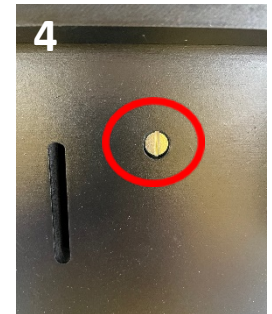

5. Rotate Spinner Base (A) to align pre-drilled holes. Screw one Bolt (I) through hole in Spinner Base (A) and into Side 2 (C). Repeat for second Bolt (I) on opposite Side 2 (C).

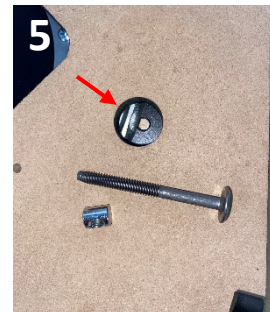


**Note:** If assembled correctly, Bolts (I) will interlock with Cross Dowels (J) for stability.





6. Flip the entire display right-side up.

**Note:** Flipping the display will require two people.

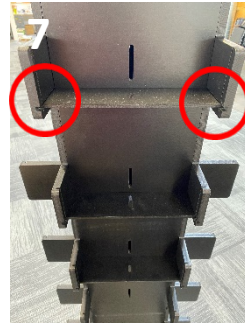


7. Slide Shelves (D) into grooves at bottom of tabs on sides. Then place Shelf Dividers (F) into the aligning slots on sides and Shelves (D).

8. Peel off white film from both sides of Acrylic Inserts (E). Insert Acrylic Inserts (E) into the vertical grooves at the front of the tabs on sides (to create a pocket).






9. Remove film from double-sided tape on back of Marketing Sign (G). Place at top of display, centered on Side 2 (C). Repeat for second Marketing Sign (G) on opposite Side 2 (C).

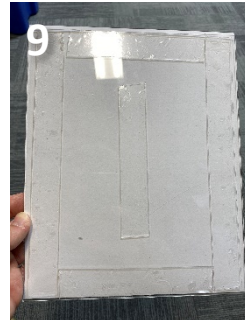

10. Congratulations! Display is ready to load with product.



**Note:** To place backer cards, begin by folding along scored lines. Once folded, place on shelf with category name facing forward.

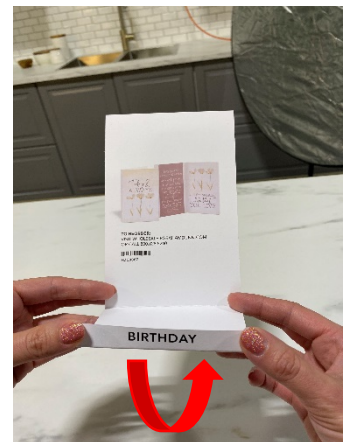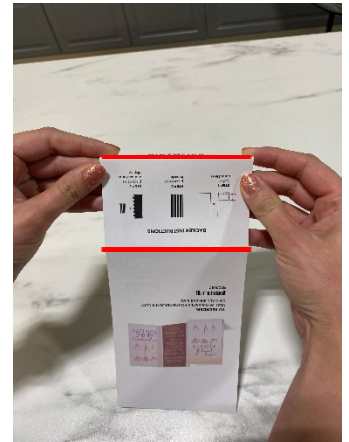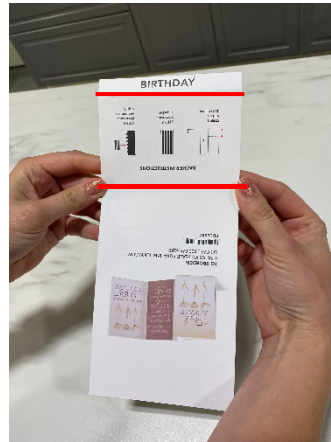

## Keepsake Cards



POPPK1-FDC1